UB Series



USB AC/DC Adaptor 5W Series











▲ UB305

▲ UBY305

▲ UBE305

▲ UBA305

UBK305









Please contact our sales department for safety standar of each model.















Product Highlights

- Stability
- Ultra small size
- Light weight
- Energy efficiency
- Suit MP3 player, Mobile Phone, Portable GPS device, PDA

Protection

- Short circuit protection
- Over Voltage Protection
- Over Current Protection

Safety Approvals

- UL60950
- CAN/CSA C22.2 NO. 60950
- PSE
- IEC/EN60950-1

Efficiency

Meet Doe Level VI

Immunity

■ EN55024/A1:2001

Emissions

- CE CISPR 32 Class B
- VCCI Class B



Input								
Description	Min	Тур	Max	Units	Comment			
Voltage	90	100~240	264	VAC				
Frequency	47	50/60	63	Hz				


Environmental								
Description	Min	Тур	Max	Units	Comment			
Operating Temperature	0	-	40	°C	Free Convection, Sea level			
Storage Temperture	-20	-	65	°C	Free Convection,Sea level			
Operating Humidity	5	-	95	%RH	No Condensing			
Storage Humidity	5	-	95	%RH	No Condensing			

Typical model list

Input Condition		DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noises	Regulation		Ontion/Domant
							Line	Load	Option/Remark
Input Voltage: 90V-264Vac Frequency: 47-63Hz	1	5V	0.5A	±5%	100mV	200mV	2%	10%	
	2	5V	1.0A	±5%	100mV	200mV	2%	10%	
	3	-	-	-	-	-	-	-	

^{1.} Mesurements shall be made with an oscilloscope with 20MHz bandwidth.


Mechanical Spec

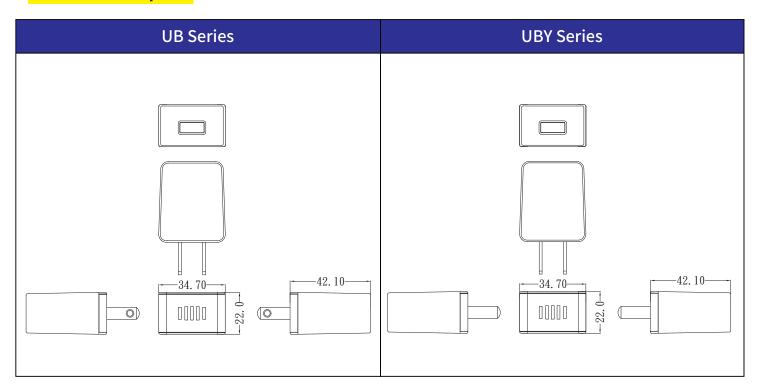


^{2.} Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec



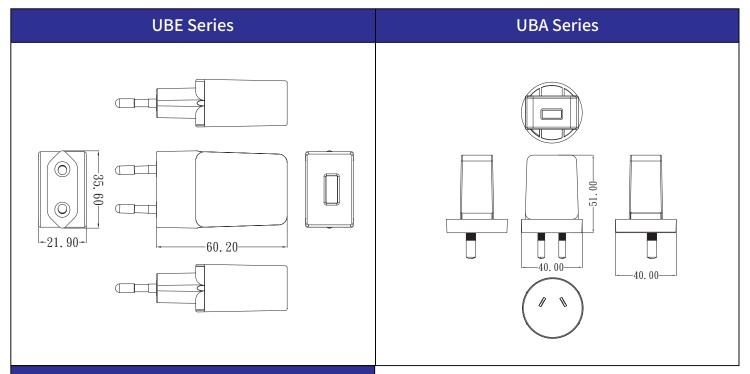

UBK Series

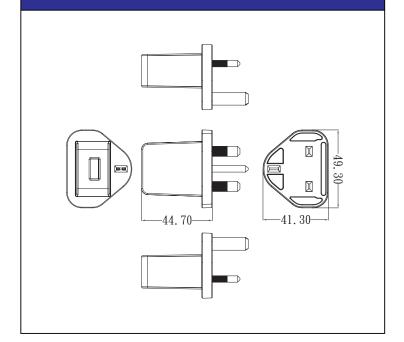

• the following blank —